



Fig. 0586S0A

Fig. 0586S0A Swivel Fill Limit Valve (FLV)

CONSTRUCTION:

- Machined Aluminum
- Blue Polymer Valve
- Standard ullage depths range from 3/8" to 1-1/2"
- For mounting on aluminum tanks
- See page E-10 for more FLV information

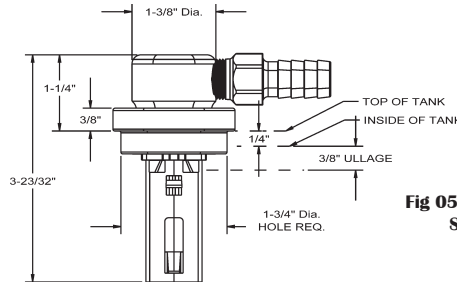


Fig 0586S0A038 Shown



Fig. 0586S0A112

Fig. 0586S0A118

Fig. 0586S0A034

Fig. 0586S0A038

Technical Information

Catalog No.	Length Inches	Width Inches	Projection Inches	Ullage Depth Inches	Hose Connection Inches	Mounting Hole Dia. Inches
0586S0A038	3-23/32	2	1-1/4	3/8	5/8	1-3/4
0586S0A034	4-3/32	2	1-1/4	3/4	5/8	1-3/4
0586S0A118	4-15/32	2	1-1/4	1-1/8	5/8	1-3/4
0586S0A112	4-27/32	2	1-1/4	1-1/2	5/8	1-3/4

Ordering Information - OEM Bulk Pkg. 10 Pcs.

Catalog No.	Style	Ullage Depth Inches*	Collar	For Use on Tank Type	Angle Port	Fire Test Capable	Shipping Weight Lbs.
0586S0A038	Swivel	3/8	Yes	Aluminum	90°	Yes	4.0
0586S0A034	Swivel	3/4	Yes	Aluminum	90°	Yes	4.2
0586S0A118	Swivel	1-1/8	Yes	Aluminum	90°	Yes	4.8
0588S0A112	Swivel	1-1/2	Yes	Aluminum	90°	Yes	5.5

*Note: Longer shut-off heights in 1/2" increments are generally available up to 5-1/2". For custom heights, contact the factory.