

IN-LINE VENT SURGE PROTECTOR

Features & Benefits

Features:

- Aluminum float
- Designed to install inside vent hose
- Can be installed up to 45° off vertical
- Allows unobstructed airflow at fill rates up to 18gpm

Benefits:

- Simple to install
- Aids in automatic pump shutoff
- Prevents wellback in vent line
- Prevents fuel surges and backsplash during refueling
- Inexpensive alternative to fill limit valves
- Introduces no potential leak points

Technical Specifications

Material & Finish:

- Black polymer valve
- Aluminum surge float



Technical and Dimensions:

- For 5/8" Fuel hose vent line
- Diameter: 5/8"
- Length: 1-9/16"

Note: Consult Perko for details on how to install the surge protector as a replacement for a fill limit valve.

Diagram illustrates placement of surge protector in the vent line.

Patent Pending

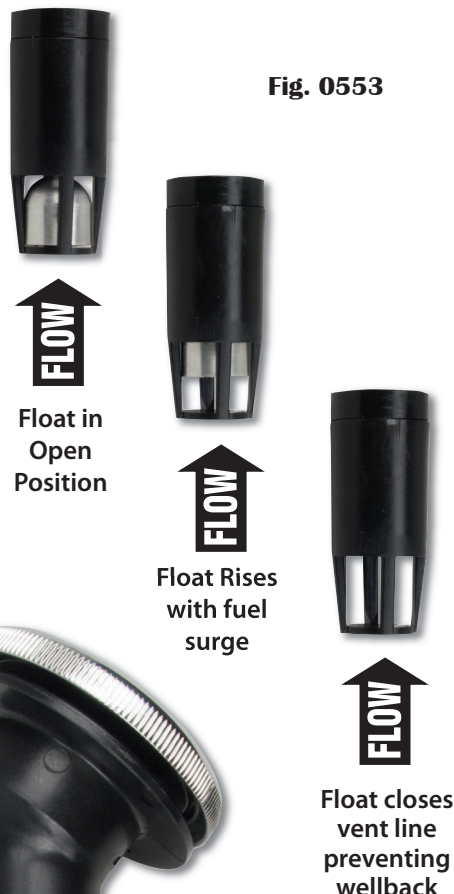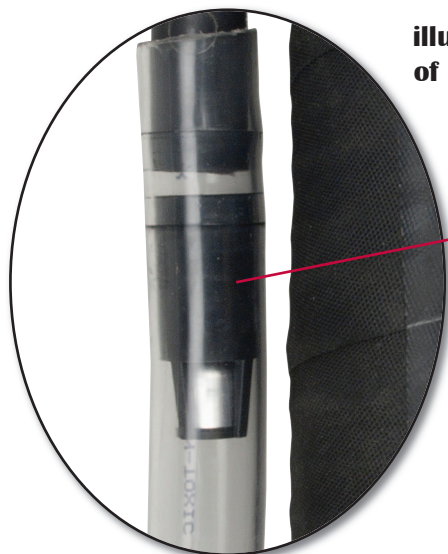

16490 N.W. 13th Avenue • Miami, FL 33169-5707
www.perko.com

